





Key Features

- Built with advanced hydraulic design, premium materials, and the strictest quality standards
- Stainless steel, dynamically balanced impeller for improved efficiency and wear / corrosion resistance
- Lip Seals and V Seal for additional protection against leakage and dust ingress
- Multiple design configurations (engine & frame mounted) for maximum installation flexibility
- All components fully interchangeable with existing F16 & F18 bearing housing / frames of competing brand

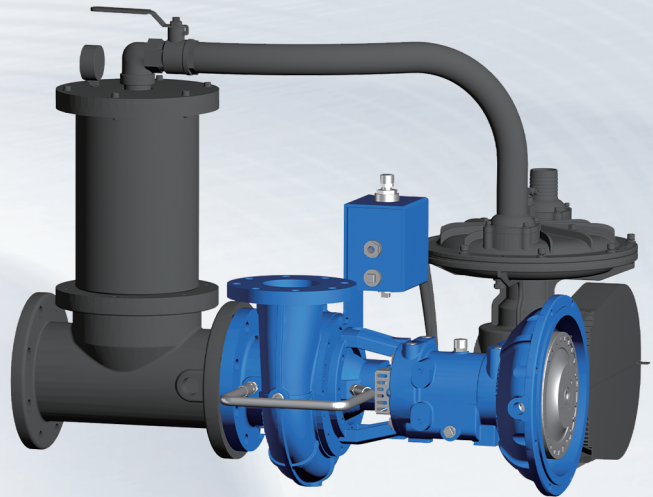


Product Advantages

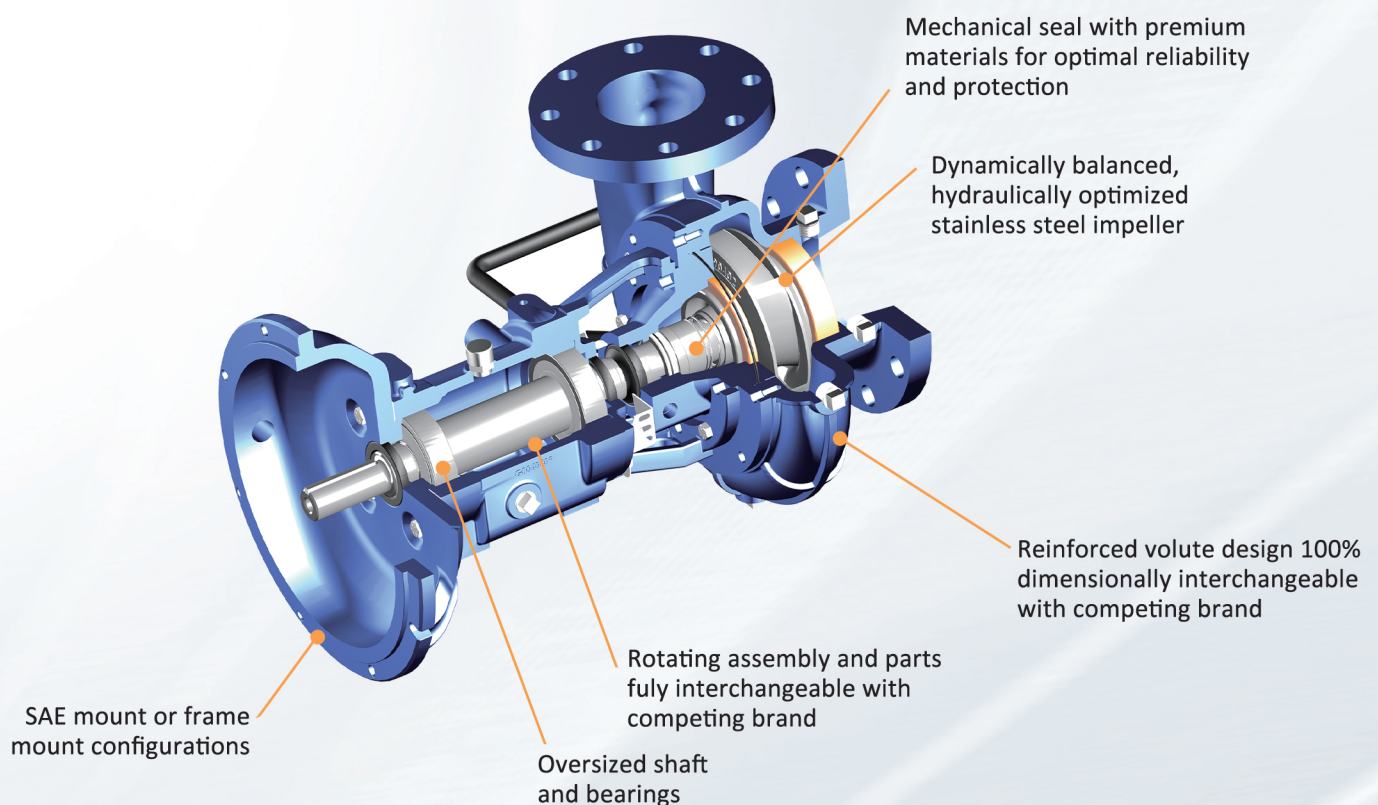




Pump Performance

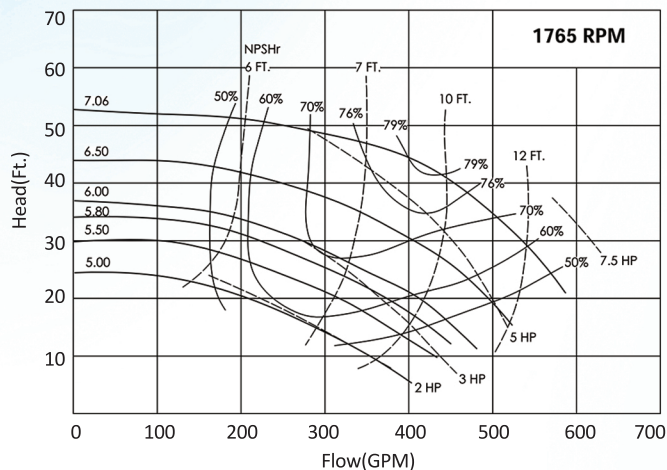

Specifications


Flow	Up to 600 GPM at 1765 RPM
Head	Up to 60 ft
Suct. / Discharge	5" x 4"
Mounting	SAE Engine Mount or Frame Mount
Volute	Cast Iron ASTM A48 CL30
Impeller	Stainless Steel ASTM A743 CA40
Mechanical Seal	Type 1 Carbon/Tungsten Carbide
Weight	210 lbs

Installation Dimensions

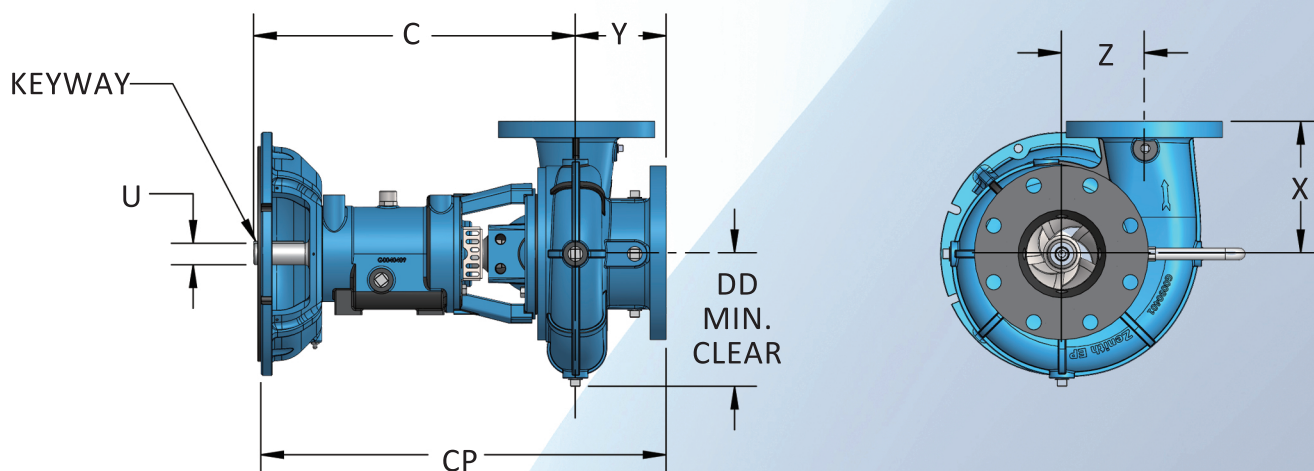

MODEL	FRAME	CONNECTION		DISC. INCR.	C	CP	DD	U	X	Y	Z	KEY
		DISCH.	SUCT.									
P2D04	F5	4"	5"	90°	18.48"	23.28"	7.67"	1.25"	7.55"	5.22"	4.76"	1/4"x1/4"x2.875"

Optional Accessories



Notes:

1. Discharge position can be rotated in 45° increment per customer request
2. Pump rotation from drive end
3. Dimensions are for estimating purposes only